

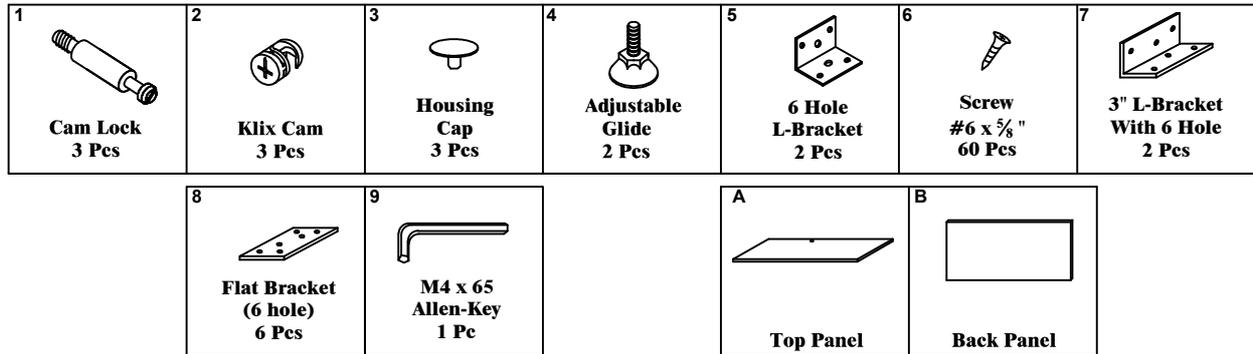


**Thank you for purchasing the Performance Bridge.  
Please follow these instructions for easy assembly.**

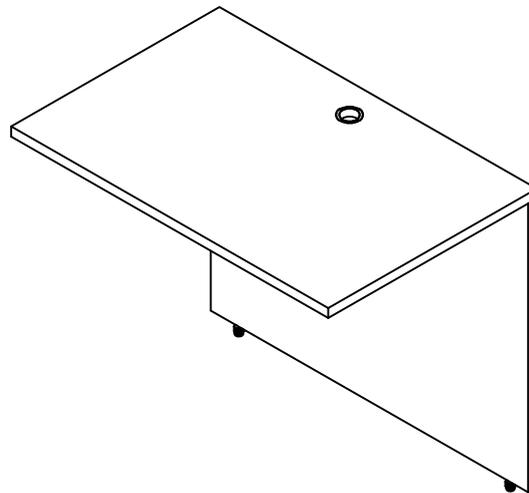


**KLIX CAM INSTRUCTIONS**

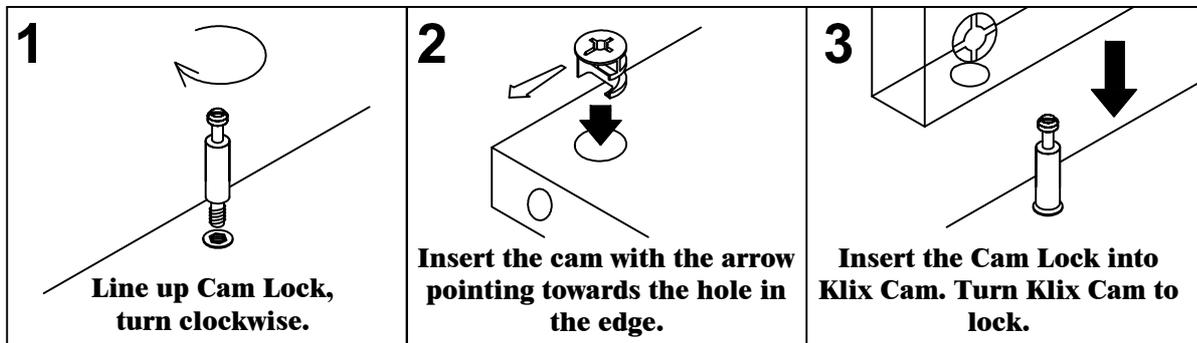

**IMPORTANT !**


- Place all wooden parts on a clean and smooth surface such as a rug or carpet to avoid the parts from being scratched.
- Check that you have all parts and hardware.
- Remove all wrapping materials, including staples & packing straps before you start to assemble.
- Do not tighten any screws or bolts until the unit is completely assembled.
- Keep all hardware parts out of reach of children.

**1**

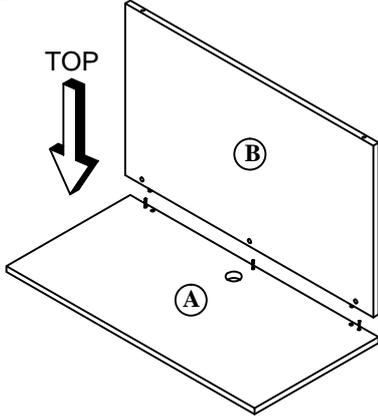


**Attach Back Panel(B) to Top Panel(A) by using Cam Lock(1) and Klix Cam(2) as shown in Detail- X.**

**2**

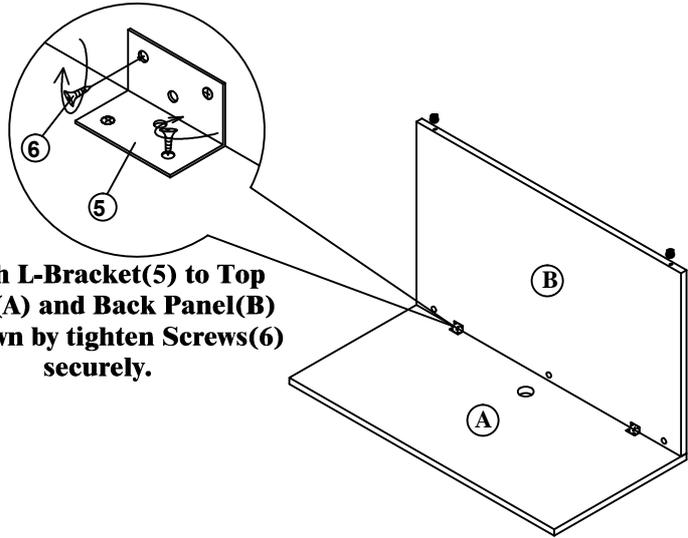


**Attach L-Bracket(5) to Top Panel(A) and Back Panel(B) as shown by tighten Screws(6) securely.**

**3**



**Screw Adjustable Glide(4) into bottom of Side Panel.**

**4**

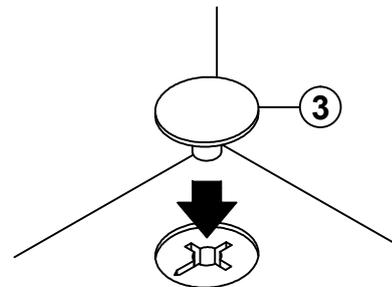

**Attach Housing Cap(3) to all Klix Cams(2) by pushing neck through center of cam.**

**Additional hardware enclosed to allow you to attach this bridge to other pieces.**